

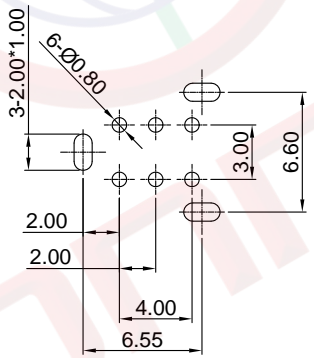
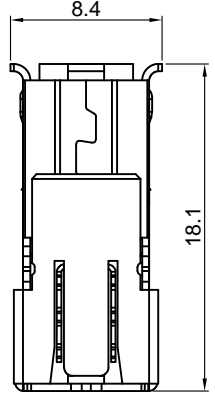


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failure or delays to exercise such rights does not constitute a waiver of such rights.

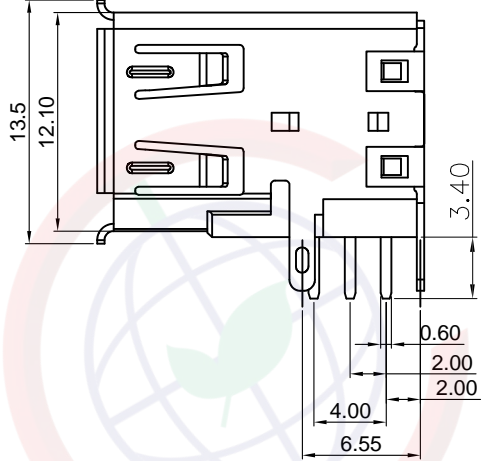

Recommend PCB layout
(Tolerance:±0.05)

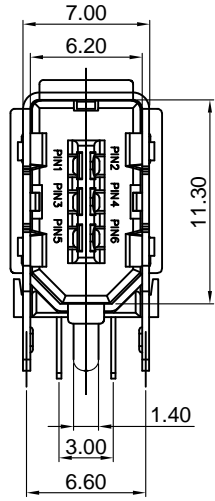

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 21/06/05'	~	LJC 21/06/05'
B	DRAWING UPDATE	JLZ 12/29/20'	~	

Notes:
Specifications:
1. Contact Resistance: 30mΩ Max.
2. Insulation Resistance: 100MΩ Min.
3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
4. Current Rating:1.5A.
5. Voltage Rating:40V AC/DC.
6. Temperature: -25°C~+85°C.
Materials:
1. Contact Material: Copper Alloy.
2. Contact Plating: Gold&Tin Plating Over Nickel.
3. Insulator Material: PBT,Black,UL94-V0.
4. Shell Material: Copper Alloy, Nickel Plated.

Product Number Code:
DS1100 - X X X
 Contact plating
 C: Selective 3u" gold
 Shell plating
 N: Nickel
 6: Tin
 Housing color
 B: Black

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	IEEE 1394 Female 6 Pin R/A Type	
X. ±0.60	X. ±5°	UNITS	mm	SHEET	DS1100 SERIES	
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1100 SERIES	
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE	CUSTOMER					
SCALE	1:1					
DRAWING NO.	C-DS1100-XXX-B					