


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 22/06/05'		LJC 22/06/05'
C	DRAWING UPDATE	JLZ 04/27/21'		

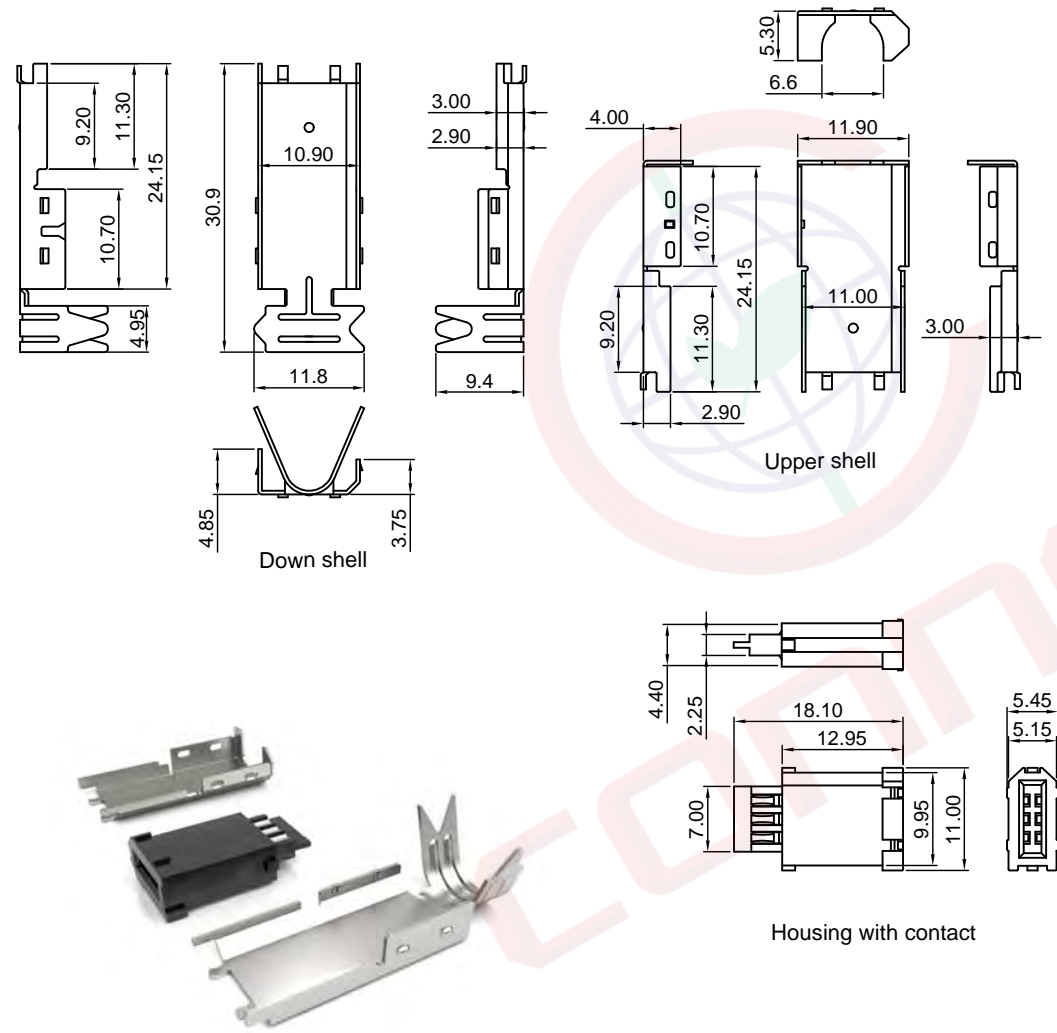

NOTES:

- Specifications
 - Contact Resistance: 50mΩ max
 - Insulator Resistance: 100MΩ min.
 - Current Rating: 1.5A per pin max.
 - Rated Voltage: 30V DC
 - Dielectric withstanding voltage: AC 500V For 1 minute
 - Contact: Copper Alloy
 - Housing: Thermoplastic(UL 94V-0)
 - Shell: Steel

2. Product number code:

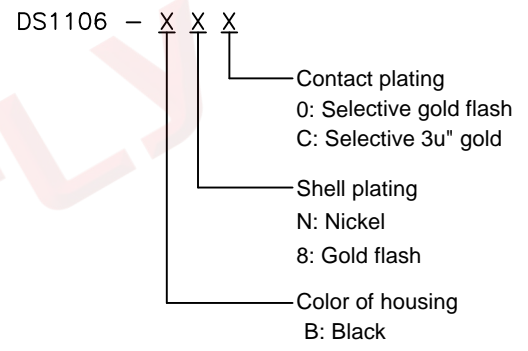

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	IEEE 1394 6Pin Male Solder Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1106 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1106-XXX-C					