

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/19/17'	~	

NOTES:








1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 1000V(AC)
- .CONTACT RESISTANCE: 20mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min.

2.PRODUCT NUMBER CODE:

DS1110-15 - X X X X

- SHELL SURFACE FINISHED  
N: NICKEL
- CONTACT PLATING  
8: FULL GOLD FLASH
- COLOR OF HOUSING:  
L: BLUE
- No. OF CONTACTS  
02: 2pin 03: 3pin  
04: 4pin 05: 5pin  
06: 6pin 07: 7pin

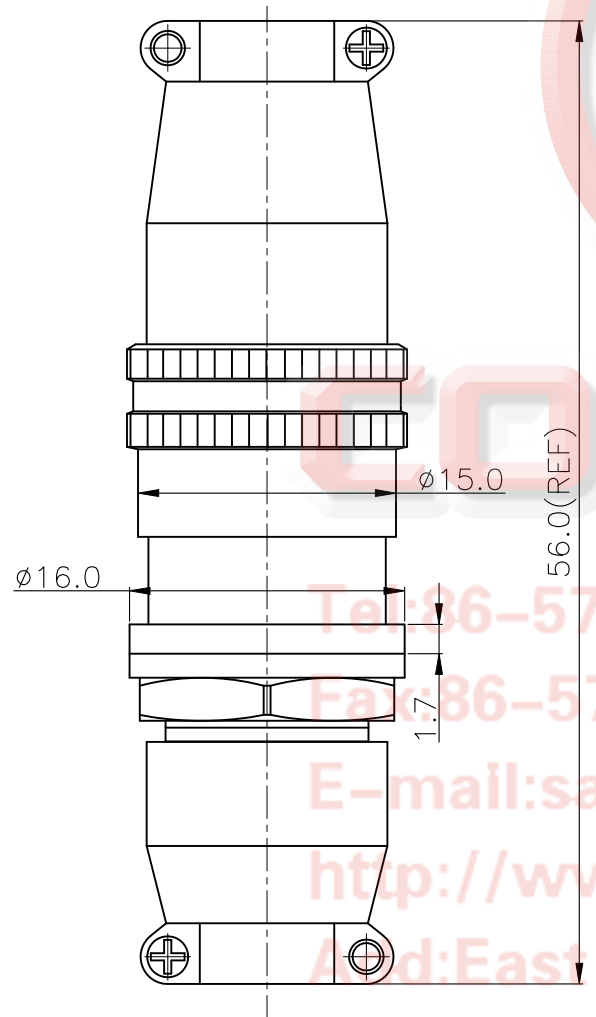

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone,KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Micro Jack Total Length=56mm Ref(Pin Ø1.0)
X.	±0.60	X.	±5°	UNITS	mm	Wire To Wire Push Pull Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1110-15 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1110-15-XXX-A					