
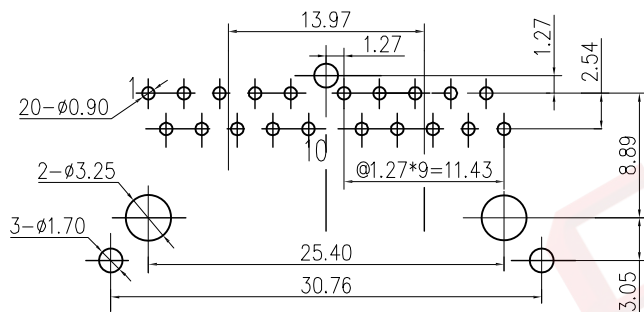
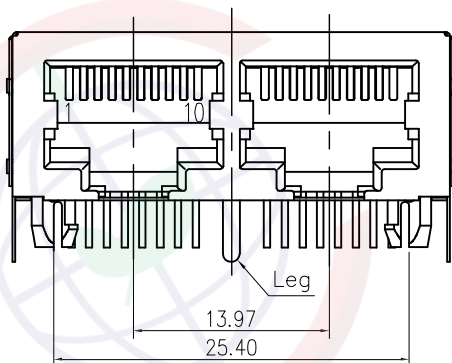


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/11/17'		


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING:125V.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD FLASH OVER NICKEL.
 - INSULATOR MATERIALS: PBT, BLACK.
- PRODUCT NUMBER CODE:
DS1127-01-X X X X X X X

- Leg Type
X:W/O Leg
S:W/ Leg
- Shell Type
X:W/O Shrapnel
- Housing Materials
P:PBT
- Contact Plating
C:Full 3u" gold
- Housing Color
B:Black
- No.Of Contacts
8:10p8c(2.3.....8.9)
- Connector Type
S:Socket

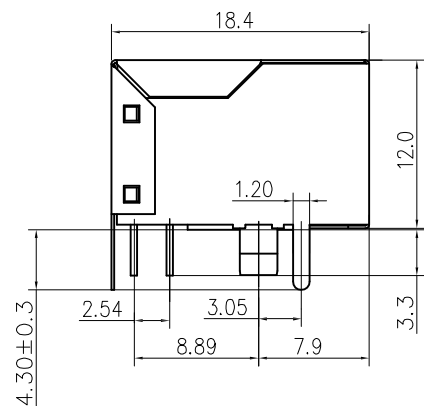

PCB LAYOUT
THICKNESS=1.6mm

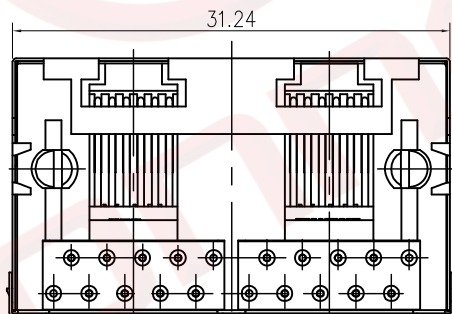

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB Jack 10 Positions 1*2 Port W/ Shell 3.05mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1127-01 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1127-01-XXXXX-GM-A					