
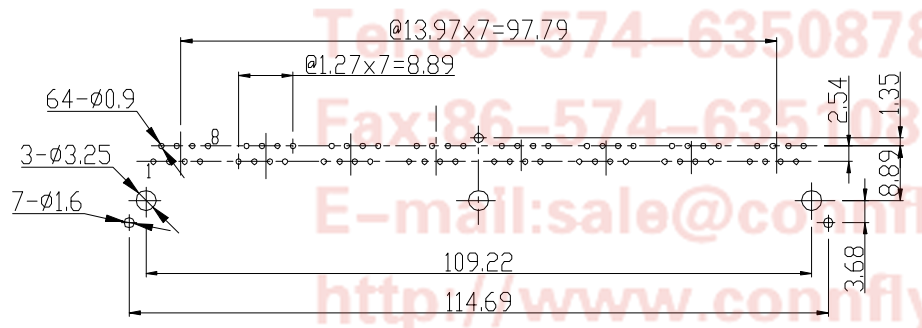
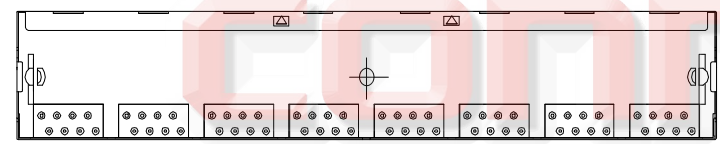


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/27/16'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - CURRENT RATING:1.5A.
  - VOLTAGE RATING:125V AC RMS.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS
  - CONTACT MATERIAL: COPPER ALLOY, PLATED GOLD.
  - SHELL MATERIAL: COPPER ALLOY, PLATED NICKEL.
  - INSULATOR MATERIALS: PBT,UL94-V0.
- MECHANICAL
  - MATING/UNMATING FORCE:30N MAX.
  - RETENTION STRENGTH:50N FOR 60s±5s
  - DURABILITY:600 CYCLES MIN.
- PRODUCT NUMBER CODE:  
DS1130-01-X X X X X X

- Shell Type  
S:W/ Shrapnel  
X:W/O Shrapnel
- Housing Materials  
P:PBT
- Housing Color  
B:Black
- Contact Plating  
8:Gold Flash  
C:Full 3u" Gold
- No.Of Contacts  
8:8p8c
- Connector Type  
S:Socket

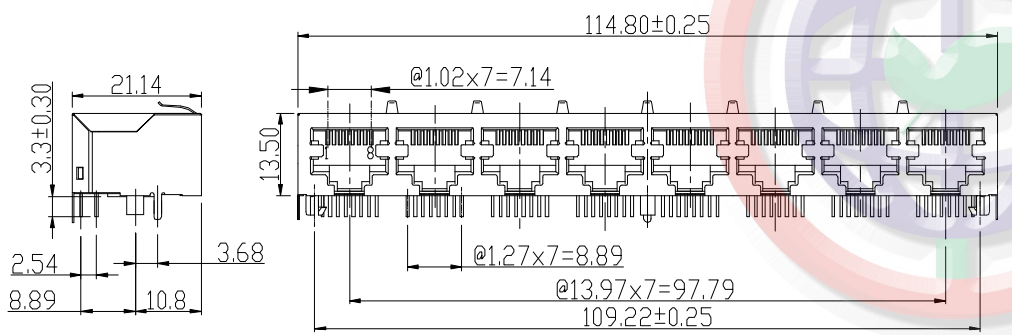

RECOMMENDED PCB LAYOUT (VIEWED FROM COMPONENT SIDE)  
THICKNESS=1.6MM TOLERANCE ±0.05

Tel: 86-574-63508787  
Fax: 86-574-63510817  
E-mail: sale@connfly.com  
http://www.connfly.com  
Add: East Industry Zone KuangYan  
Town Cixi Ningbo China  
P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1130-01-XXXXX-A		

PROJECTION	TITLE	PCB Jack 8 Positions 1*8 Port W/ Shell 3.68mm Type	
UNITS	mm	SHEET	DS1130-01 SERIES
SHEET SIZE	A4	SERIES	DS1130-01 SERIES

晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**